

A high temperature self-regulating heating cable.

FailSafe + Inherently Temperature-Safe Heating Cable

- 225°C exposure temperature withstand, (energised or switched off).
- *Inherently temperature-safe. (ITS)*
- Power outputs to 75W/m at 10°C
- External temperature controls not necessary.

DESCRIPTION

FS+ is a high temperature self-regulating heating cable, having an exposure limit of 225°C, energised or not.

It may be provided with a continuous extruded metal jacket for applications where high mechanical strength is required or a metal braid where flexibility is preferred.

The continuous metal outer jacket is ductile, yet withstands high mechanical loads, thus averting damage when being installed in arduous environments.

Easy terminations, cut-to-length.


Safest ever self-regulating product range for high temperature exposure; will not overheat even when exposed to 225°C when energised or switched off as it is *inherently temperature-safe*.

ATEX and IECEx Approved.

INHERENTLY TEMPERATURE-SAFE

“The inherent ability to self-regulate at a temperature level below the maximum product rating and withstand temperature of the insulating materials, without the need for temperature control.”

Similar competitor self-regulating products are typically limited to a maximum energised temperature, typically 120°C at which point, their retained power output prevent the cable from self-regulating at its own limiting temperatures. All such products require temperature control to ensure their own temperature safety.

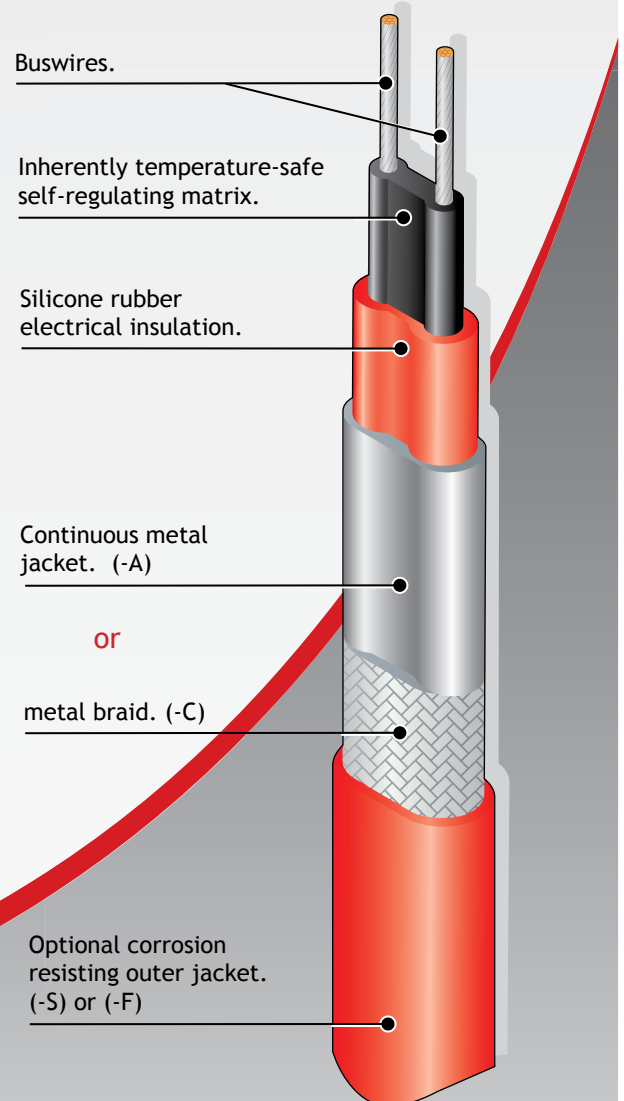

SPECIFICATION

MAXIMUM CONTINUOUS EXPOSURE

TEMPERATURE: 225°C (437°F)
(ENERGISED OR SWITCHED OFF)

MINIMUM OPERATING

TEMPERATURE: -65°C* (-85°F)

MINIMUM INSTALLATION

TEMPERATURE: -40°C (-40°F)

POWER SUPPLY:

12 - 277V AC

TEMPERATURE CLASSIFICATION:

15FS+, 30FS+, 45FS+ & 60FS+ T3 (200°C)
75FS+ T2 (300°C)

WEIGHTS & DIMENSIONS:

Type Ref	Dimensions (mm) +/-0.5	Weight kg/100m	Min Bending radius	Gland Size
FS+A	12.45 x 6.25	11.9	50mm	M20
FS+AS	14.45 x 8.25	15.1	50mm	M20
FS+AF	13.35 x 7.15	15.0	50mm	M20
FS+C	11.65 x 5.45	9.9	35mm	M20
FS+CS	13.65 x 7.45	12.9	45mm	M20
FS+CF	12.55 x 6.35	12.8	40mm	M20

APPROVAL DETAILS:

ATEX - CML 17ATEX3154
IECEX - CML 18.0082
DNV-GL - E12834
EAC* - TC RU C-GB.MIO62.B.06041
Japanese - CML 17JPN3007X - 1 to 2

ORDERING INFORMATION:

Example; 45 FS+ 2 - A or C S or F
Output 45W/m at 10°C
FS+ Heating Cable
Supply Voltage 220 - 277V AC
Continuous Metal Jacket
Metal Braid
Outer Sheath, Silicone Rubber
Outer Sheath, Fluoropolymer

ACCESSORIES:

Heat Trace supply a complete range of accessories including termination/splice kits, end seals, junction boxes and controls. Such items carry separate approvals from the heating cables. Use only approved components, as per system certification.

INGRESS PROTECTION:

IP67

ATEX & IECEX MARKINGS:

Ex II 2 GD

Ex e IIC T3 or T2# Gb

Ex tb IIIC T200°C or T300°C Db

EN 60079-0: 2012+A11:2013

EN 60079-31: 2014

EN 60079-30-1: 2007

MAXIMUM LENGTH (m) vs. CIRCUIT BREAKER SIZE:

The following circuit details relate specifically for the trace heating of pipework and equipment. For any other application consult Heat Trace.


Cat Reference	Environmental Start-up Temp.	230V				
		10A	16A	20A	32A	50A
15FS+	10°C	76	122	154	172	172
	0°C	70	112	140	172	172
	-20°C	62	98	122	172	172
	-40°C	52	82	102	164	172
30FS+	10°C	52	82	102	122	122
	0°C	46	74	92	122	122
	-20°C	40	66	82	122	122
	-40°C	34	54	68	110	122
45FS+	10°C	38	62	76	100	100
	0°C	34	56	70	100	100
	-20°C	30	50	62	98	100
	-40°C	22	34	44	70	100
60FS+	10°C	30	50	62	86	86
	0°C	28	44	56	86	86
	-20°C	20	32	40	62	86
	-40°C	12	18	24	38	60
75FS+	10°C	24	40	50	76	76
	0°C	18	30	38	60	76
	-20°C	14	22	26	42	66
	-40°C	8	12	16	26	40

For use with Type C circuit breakers to IEC60898

These circuit lengths may be exceeded dependant on specific design parameters.

THERMAL RATINGS:

Nominal output at 230V when FS+ is installed on thermally insulated carbon steel pipes.

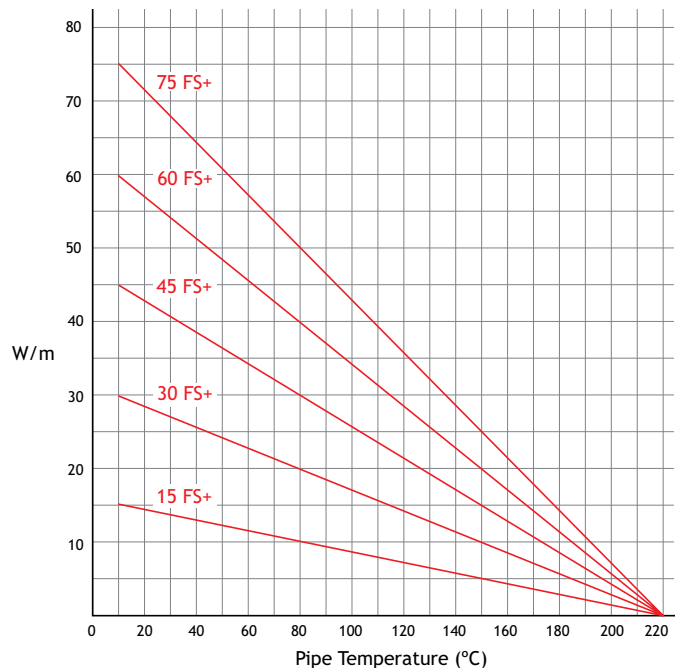

FURTHER INFORMATION:

Please consult the appropriate termination instructions and the Heat Trace Design, Installation and Maintenance Manual (HTDIMM 010) for further details.

HEAT TRACETM
SETTING THE STANDARDS LEADING THE WAY

Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.

Tel: +44 (0)1928 726451 Fax: +44 (0)1928 727846

www.heat-trace.com email: info@heat-trace.com

The information given herein, including drawings, illustrations and schematics (which are intended for illustration purposes only), is believed to be reliable. However, Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.