

SF-P/SF-T/SF-E

Universal system for termination of Heat Trace self-regulating heating cable

STRIPFREE
Universal Connection System
For Safe and Hazardous Areas

- Power Connection, or In-Line & Tee splice; plus End Seal.
- Unique cutting system ensures optimum electrical contact.
- No need to strip down to conductors.
- Suitable for use in safe and hazardous areas.
- Lower system costs.
- 16A rating.

FEATURES

SYSTEM DESCRIPTION

The STRIPFREE range of connectors is a universal power termination and splicing system for use with Heat Trace's self-regulating heating cables.

No special tools are needed to perform a neat, convenient and simple termination.


Installation comprises simply cutting the heater to length and removal of the outer sheath (if provided). The heating cable is inserted into the StripFree unit and the end connection made by screwing down the cutting blades onto the buswires, whilst automatically clamping the braid. All of this is achieved without the need to strip away the semi-conductive heating matrix.

The STRIPFREE components provide:


- Power Connection
- In-Line Splice Connection
- Tee Splice Connection
- End Seal

BENEFITS


1. **Ease of Installation.** No special tools required. No need to strip cables for connection.
2. **Reliability.** STRIPFREE has been rigorously tested for connection performance and long term reliability.
3. **Water Resistant.** Completed connectors are water and dust resistant to IP66 (SF PT) and IP67 (SFE), and the cable seals provide strain relief.
4. **High Integrity.** The STRIPFREE connector body has high impact resistance, is U.V. resistant and has excellent insulating properties resulting in a high integrity connector system.
5. **Simple End Seals.** A STRIPFREE end seal is applied simply by pushing onto the cable end. No need for adhesives, gels or heat shrink.

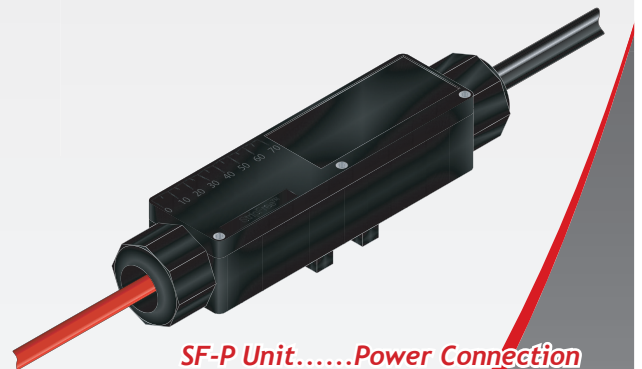

SF-P Unit.....Power Connection

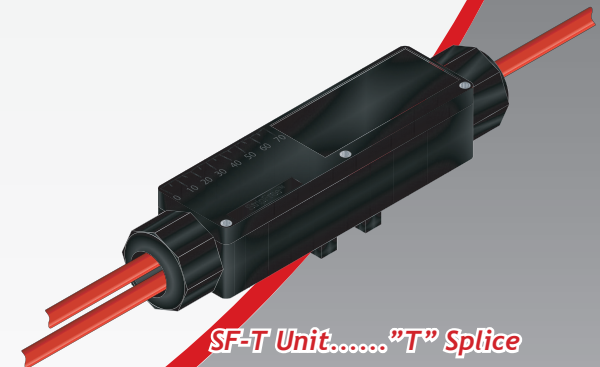

SF-T Unit....."T" Splice

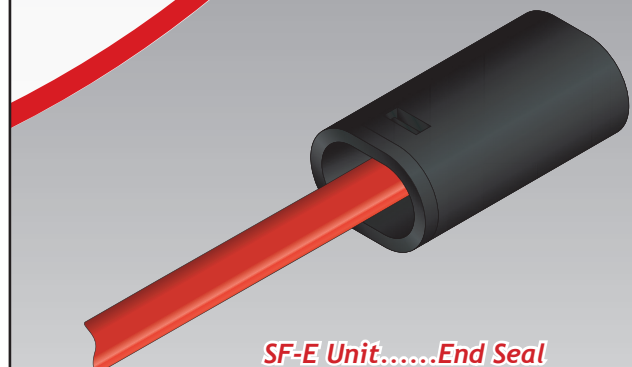

SF-E Unit.....End Seal

HEAT TRACE™
SETTING THE STANDARDS LEADING THE WAY



The **Heat Tracing Authority™**

SPECIFICATION

- COMPONENTS:** STRIPFREE Connector
STRIPFREE End Seal
Suitable bushes to allow for either:
- Power Connection (to 1 or 2 heaters)
 - In-Line Splice Connection
 - Tee Splice Connection or End Seal
 - Mounts directly onto pipe

IP RATINGS: Connector IP66, End Seal IP67

'T' CLASS: Connector T4

AMBIENT TEMPERATURE: -40°C to +50°C
(-40°F to +121°F)

MINIMUM OPERATING TEMPERATURE: -65°C (-85°F)*

SUITABLE FOR USE WITH:

FreezStop Lite Extra	FreezStop Ultimo
FreezStop Regular	FreezStop Extra
FreezStop Extra(w)	FreezStop Micro
FreezStop Super	Hotwat Regular
G-Trace	Hotwat Plus
Snomelt (SMB)	FailSafe Super
FreezStop Ultimo (w)	

MATERIALS OF CONSTRUCTION: Body - Polyamide
Conductors - Nickel Coated Brass

WEIGHT:

SF-P	STRIPFREE-Power	575g*
SF-T	STRIPFREE-T-Splice	535g*
SF-T	STRIPFREE-End Seal	24g*

*Weight including packaging

POWER CABLE: 3C X 2.5mm² (supplied separately)


CURRENT RATING: 16A Continuous

VOLTAGE RANGE: 208 - 275V


APPROVALS:

Testing Authority	Certificate Number
ATEX 	Sira 04ATEX3293X, Sira 05ATEX3099U
IECEX 	IECEX SIR 11.0136U
CNEX 	CNEX19.1560U
EAC* 	TC RU C-GB.MIO62.B.06045
CSA (Safe Area) 	1295279


STRIPFREE COMPONENTS:

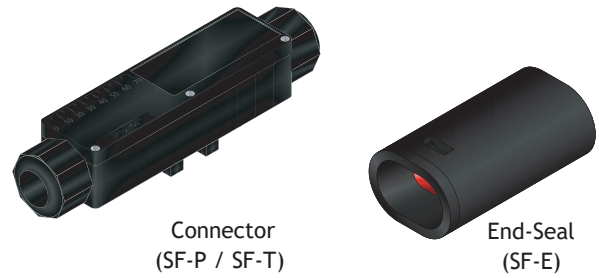


CONNECTOR: (SF-P & SF-T)

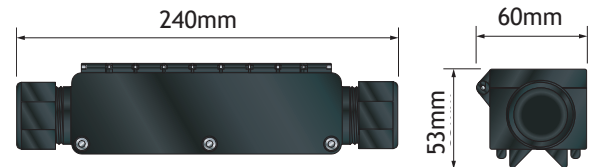


END SEAL: (SF-E)

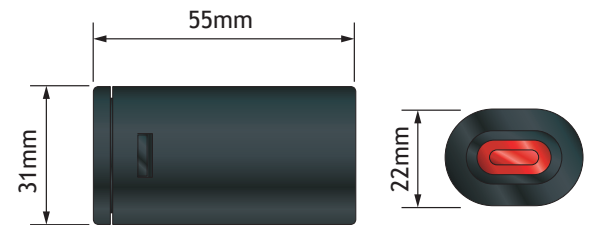

GLAND AND SEAL KIT:

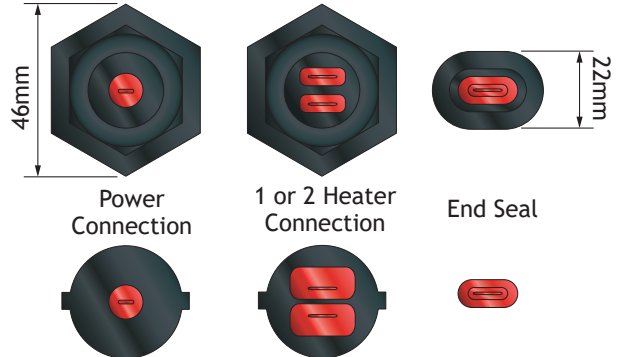

INSTALLATION EXAMPLE

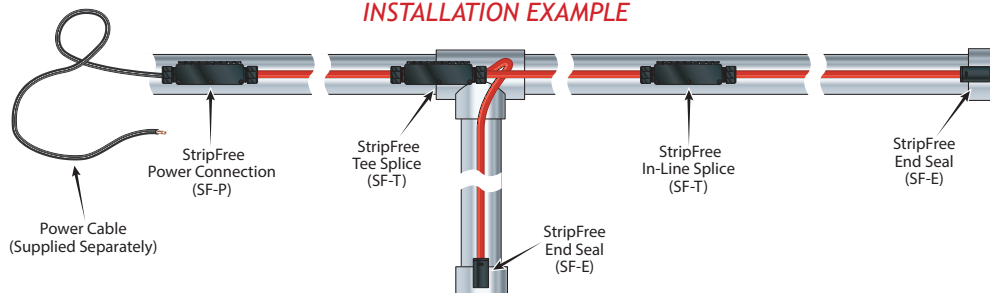

HEAT TRACE™
SETTING THE STANDARDS LEADING THE WAY

Heat Trace Ltd, Mere's Edge, Chester Road, Helsby, Frodsham, Cheshire, WA6 0DJ, England.
Tel: +44 (0)1928 726451 Fax: +44 (0)1928 727846
www.heat-trace.com Email: info@heat-trace.com

The information given herein, including drawings, illustrations and schematics (which are intended for illustration purposes only), is believed to be reliable. However, Heat Trace Ltd makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Users of Heat Trace Ltd products should make their own evaluation to determine the suitability of each such product for specific applications. In no way will Heat Trace Ltd be liable for any damages arising out of the misuse, resale or use of the product.